IASJ المجلات الاكاديمية العراقية

Tikrit Journal of Pure Science

ISSN: 1813 – 1662 (Print) --- E-ISSN: 2415 – 1726 (Online)

Journal Homepage: http://tjps.tu.edu.iq/index.php/j

The Stability Of Crank – Nicholson and Explicit Methods for Numerical Solution for Sine – Gordon Equation

Ramyi N . ALI , Awni M . Gaftan

Department of Chemistry, College of Science, Tikrit University, Tikrit, Iraq

ARTICLE INFO.

Article history:

-Received: 21 / 11 / 2022
-Received in revised form: 25 / 12 / 2022
-Accepted: 24 / 1 / 2023
-Final Proofreading: 2 / 6 / 2023
-Available online: 25 / 6 / 2023

Keywords: Stability , Sine – Gordon Equation , Crank – Nicholson Methods , Explicit Methods .

Corresponding Author:

Name: Ramyi N . ALI

E-mail: ramyinazar@gamil.com

Tel:

©2022 COLLEGE OF SCIENCE, TIKRIT UNIVERSITY. THIS IS AN OPEN ACCESS ARTICLE UNDER THE CC BY LICENSE http://creativecommons.org/licenses/by/4.0/

ABSTRACT

In This Paper, We Solve The Sine – Gordon Equation by two Numerical Methods : Crank – Nicholson and Explicit and we discuss The Stabilities , and we obtained That The Stability Crank – Nicholson Methods is More Than The Stability Of Explicit Methods .

استقراريه الحل العددي بطريقتي كرانك –نيكلسون Crank-Nicholson والطريقة الصريحة Explicit Method لمعادلة Sine-Gordon

رامي نزار علي، عوني محمد كفطان

جامعة تكريت / كلية علوم الحاسوب والرياضيات/ قسم الرياضيات

الملخص

في هذا البحث قمنا بحل معادلة Sine-Gordon باستخدام طريقتين عدديتين .هما طريقة كرانك – نيكلسون , (Crank-Nicholson) وطريقة Explicit Methodواستقرارية تلك الحلول وتوصلنا الى ان الطريقة الصريحة مستقرة , بينما كانت طريقة كرانك – نيكلسون(Crank-Nicholson)اكثر استقرارية (استقرارية غير مشروطة).

الكلمات المفتاحية : الاستقرارية , معادلة Sine-Gordon , طريقة Crank-Nicholson , الطريقة الصريحة (Explicit Method)

Introduction

The differntail equation is one of the types to describe many of Phenoumena in Physics , Chemical , Engeneer . and there are Many numerical Methods that are Used to Solving the Problems , Finite difference Methods (FDM) *and Finite Elements Methods* (FEM)

are two Methods are More using , but . There are a lot of risks When applying These Methods [1] . The numerical Solution for Partial differentail equations is absultly find The experimental solution specially When We Using (FDM) , [2] .

In (1939) Frenkel , Kontorova are in traduced Sine – Gordon equation in Physics. And in (1962) Peering and Skyrme are Studied the numerical result for some Chemical Problems [11] . Forest and Mclaughlin , Ercolani in (1990) are improved the geometry formula of Sine – Gordon equation which can be integrable under periodicaly boundary Conditions , and they are obtain the good numerical results [5].

In (2003) Ares , Guesta , Sanchez and Toral are study the model of Sine – Gordon equation analyticaly and numerically[4] .

In (2005)Khomeriki and Leon are described the Bi – Stability behavior Case as appositive non linear equation and they are explain this numerically [7].

2- The Mathmatical Model

Now , we derive the mathematical Model for Sine-Gordon equation by Klein – Gordon equation , where the governing equation is in the bellow formula

$$\frac{\partial^2 u}{\partial t^2} \qquad (1)$$

Where d is the wave speed , f(u) the density of elasticity power .

Note : if f(u) = g(u) then , the equation (1) are become to Klein – Gordon linear equation

i.e : $$\frac{\partial^2 u}{\partial t^2} - d^2 \frac{\partial^2 u}{\partial x^2} + gu = 0 \qquad (2)$$

if g=0 then Klein – Gordon become traditional Wave equation , and if f(u) = Sine u the equation (2) become Sine – Gordon equation [5] , [8] .

$$\frac{\partial^2 u}{\partial t^2} - d^2 \frac{\partial^2 u}{\partial x^2} = -Sine\ u \qquad (2)$$

$$\frac{\partial^2 u}{\partial t^2} - \frac{\partial^2 u}{\partial x^2} = -Sin\ u \qquad (3)$$

And with boundary and initial Conditions

$u(x,0) = p + e_0 \cos[mx]$, $u_t(x,0) = 0$

$m \frac{1}{\sqrt{2}}$, $l = 2\sqrt{2}\,p$, $0 \le e_o \le 1000$, $-L \le x \le L$

$u(-L,t) = u(L,t) = b$, where b is constant

The following equation is called $[Perturbed\ Sine\ Gordon\ Equation]$

$$\frac{\partial^2 u}{\partial t^2} - \frac{\partial^2 u}{\partial x^2} = -\sin u + e\ \sin[d_t + d_o] \qquad (4)$$

Where e is a capacity and d is frequency , d_o is a Phase [10].

Also , the equation bellow is called Fractional Sine – Gordon equation

$$u_{xx} - {}^R D^a u + Sin\ u = 0 \qquad (5)$$

${}^R D^a$ is the Fractional derivative on Riesz space

3- The drivat general form of Explicit

First Step we divide the region . Rectanguls : $R = [(x\,,t) = -L \le x \le L\,, 0 \le t \le C]$ to $[n-1]\,,[m-1]$ from the Rectanguls for Length Side $\Delta x = h$, $\Delta t = k$, as show bellow [9]

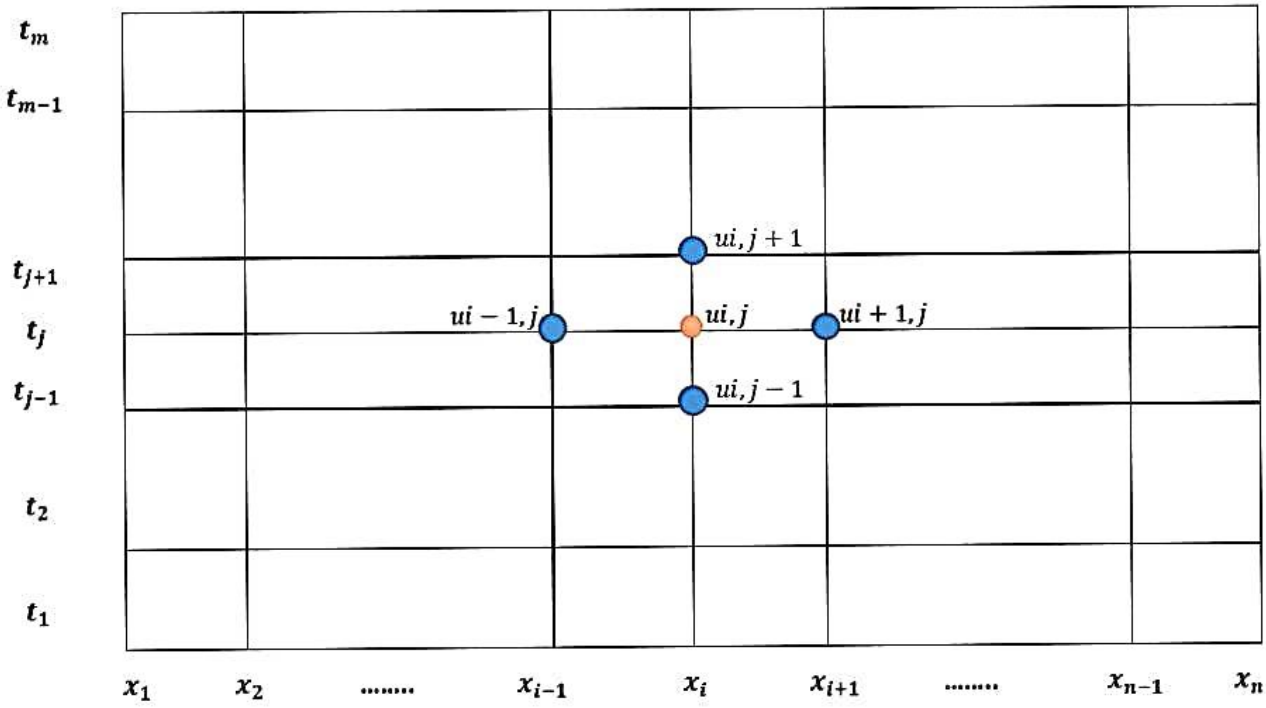

The form (1) represent mesh (*Explicit method*)

From level 1: Calculate the value $t = t_1 = 0$ [3]

$u\,(x_i\,,t_1) = p + e_o \cos[mx_i]$, $i = 1\,,2\,,3\,,4\,,\ldots\,,n-1$ where

$0 \le e_o \le 1000$, $m = \frac{1}{\sqrt{2}}$, $l = 2\sqrt{2}\,p$

Where the differences are used to approximate u_{tt} (x,t) , $u_{xx}(x,t)$

$$u_{tt}\,(x\,,t) = \frac{u\,(x\,,t+k\,)-2u\,(x\,,t\,)+u\,(x\,,t-k)}{k^2} + O\,(k^2) \qquad (8)$$

$$u_{xx}\,(x\,,t) = \frac{u\,(x+h\,,t\,)-2u\,(x\,,t\,)+u\,(x-h\,,t\,)}{h^2} + O\,(h^2) \qquad (9)$$

And the nodes are :

$x_{i+1} = x_i + h\,, x_{i-1} = x_i - h\,, t_{j+1} = t_j + k\,, t_{j-1} = t_j - k$

Ignore $O\,(k^2)$, $O\,(h^2)$ the we obtain getting:

$$u_{tt}\,(x\,,t) = \frac{u\,(x\,,t+k\,)-2u\,(x\,,t\,)+u\,(x\,,t-k)}{k^2} \qquad (10)$$

$$u_{xx}\,(x\,,t) = \frac{u\,(x+h\,,t\,)-2u\,(x\,,t\,)+u\,(x-h\,,t\,)}{h^2} \qquad (11)$$

Also , to find the values 2nd ($t = t_2$) level by Taylor series [9] :

$$u\,(x\,,t) = u\,(x\,,0\,) + \; u_t(x\,,0)k + \frac{u_{tt}(x\;,0)k^{\,2}}{2!} + O\,[k^3] \qquad (12)$$

Put $x = \; x_i$

$$u\,(\,x_i\,,t) = u\,(\,x_i\,,0\,) + \; u_t(\,x_i\,,0)k + \frac{u_{tt}(\,x_i\;,0)k^{\,2}}{2} + O\,[k^3] \qquad (13)$$

Where

$$u_{tt}\,(\,x_i\,,0) = \frac{u\,(\,x_{i+1}\,,0\,)-2u\,(\,x_i\,,0\,)+u\,(\,x_{i-1}\,,0\,)}{h^2} - \; \sin[u\,(x_i\,,0)] \qquad (14)$$

$$u_t\,(x_i\,,0) = 0 \qquad (15)$$

And substitute Equation $(14\,,15)\; in\;\; equation\;(13)$ we get :

$$u(x_i,k) = u(x_i,0) + \left[\frac{u\,(\,x_{i+1}\,,0\,)-2u\,(\,x_i\,,0\,)+u\,(\,x_{i-1}\,,0\,)}{h^2} - \; sin[u\,(x_i\,,0)]\right]\frac{k^2}{2} + O(k^3)$$

$$u(x_i,k) \; = \; u(x_i,0) + \frac{r^2}{2}\,[u\,(\,x_{i+1}\,,0\,) - 2u\,(\,x_i\,,0\,) + u\,(\,x_{i-1}\,,0\,)] - \frac{k^2}{2}\;\sin[u(\,x_i\,,0)] \qquad (16)$$

And with $r = \frac{k}{h}$, and substitute ($u_{i\,,1}$) of with $u\,(x_i\,,0)$, and with taking operation simplied to equation (16) we get on level two (FDM)

$$u_{i\,,2} = \; [1 - r^2]u_{i\,,1} + \frac{r^2}{2}\,[u_{i+1\,,1} + \; u_{i-1\,,1}] - \frac{k^2}{2}\,\sin[u_{i\,,1}] \qquad (17)$$

Now show that Calculate value $u\;(x\;,\;t)$ as nodes points for class other :

$$u\,(x_i\,,\;t_j)\;: i = 1\,,2\,,3\,,\;\ldots,n-1 \quad , \quad j = 2\,,3,4\,,\ldots,m$$

As substitute $(u_{i\,,j})$ with out $u(x_i\;,\;t_j)$ *in* equations $(10\;,11)$, and by substitute equations complete in equation (3) , we get :

$$\frac{u_{i\,,j+1}-2\,u_{i\,,j}+u_{\,i\,,j-1}}{k^2} - \frac{u_{\,i+1\,,j}-2\,u_{i\,,j}+u_{i-1\,,j}}{h^2} = \sin[u_{i\,,j}] \qquad (18)$$

And from equation (18) we get :

$$u_{i\,,j+1} = \; -u_{i\,,j-1} + \; [2 - 2r^2]\,u_{i\,,j} + \; r^2[u_{i+1\,,j} + \; u_{i-1\,,j}] - \; k^2 \; \sin[u_{i\,,j}] \qquad (19)$$

And equation(19) represent (FDM)by used Explicit Method for equation $Sine - Gordon$ and used equation(19) Calculate $(j+1)$, and by value $(j-1\,,j\,)$, these the method Calculate form Explicit for value undefined $(u_{i\,,j+1})$, and by value defined

$u_{i\,,j-1}\;,\;u_{i+1\,,j}\;,\;u_{i\,,j}\;,u_{i-1\,,j}$

That show in form (1)

4- The Stability of Explicit Method

Now . we explain the Stability of Explicit Method with Von- Neumann the solution step are

$$u_{x\,,t} = \; e^{gt}\,.e^{ibx} \;\;,\; x = nh \;\;,\; t = mk \;\;,\; h = \; \Delta x \;\;,\; k = \; \Delta t$$

$$g\,,b \; > 0 \;\;,\; i = \sqrt{-1}$$

$u_{x,t} = e^{gmk} \cdot e^{ibnh} = [e^{g\Delta t}]^m \, e^{ibn\Delta x} = x^m \, e^{ibn\Delta x}$

The main step that is substitute the solution of (FDM) at time t with $x^m \, e^{ibnDx}$ [12] and with Von- Neumann can be used $[Linearized\ Stability\ Analysis]$ [6]:

$$\frac{\partial^2 u}{\partial t^2} = \frac{\partial^2 u}{\partial x^2} - u \qquad (20)$$

And by explicit Method

$$u_{n,m+1} = -u_{n,m-1} + [2 - 2r^2]u_{n,m} + r^2\left[u_{n+1,m} + u_{n-1,m}\right] - [\Delta t]^2 u_{n,m} \quad (21)$$

And by substitute $u_{n,m} = x^m e^{ibn\Delta x}$ *in equation* (21) *we geting*

$$x^{m+1} \cdot e^{ibn\Delta x} = -x^{m-1} \, e^{ibn\Delta x} + [2 - 2r^2]x^m e^{ibn\Delta x} + r^2\left[x^m e^{ib[n+1]\Delta x} + x^m e^{ib[n-1]\Delta x}\right] - [\Delta t]^2 \, x^m e^{ibn\Delta x}$$

$$x^m \, x \cdot e^{ibn\Delta x} = -x^m \, x^{-1} \, e^{ibn\Delta x} + [2 - 2r^2 - (\Delta t)^2]x^m e^{ibn\Delta x} + r^2\left[x^m e^{ib\,n\Delta x} e^{ib\Delta x} + x^m e^{ib\,n\Delta x} e^{-ib\Delta x}\right]$$

And by divide on $x^m \, e^{ibnDx}$ we getting

$$x = -x^{-1} + [2 - 2r^2 - (\Delta t)^2] + r^2[\, e^{ib\,\Delta x} + e^{-ib\,\Delta x}] \rightarrow$$

$$\frac{x^2+1}{x} = [2 - 2r^2 - (\Delta t)^2] + 2r^2 \cos[b\,\Delta x] \rightarrow$$

$$\frac{x^2+1}{x} = [2 - 2r^2 - (\Delta t)^2] + 2r^2 \left[1 - 2Sin^2\left(\frac{b\,\Delta x}{2}\right)\right] \rightarrow$$

$$\frac{x^2+1}{x} = 2\left[1 - \frac{(\Delta t)^2}{2} - 2r^2 \, Sin^2\left(\frac{b\,\Delta x}{2}\right)\right] \rightarrow$$

$$\frac{x^2+1}{x} = 2a$$

$$a = 1 - \frac{(\Delta t)^2}{2} - 2r^2 \, Sin^2\left(\frac{b\,\Delta x}{2}\right)$$

$$x^2 - 2ax + 1 = 0 \implies x = am\sqrt{a^2 - 1}$$

The must $|a| \leq 1$, x is factor

$$\left|1 - \frac{(\Delta t)^2}{2} - 2r^2 \, Sin^2\left(\frac{b\Delta x}{2}\right)\right| \leq 1 \qquad (22)$$

And from Inequalities (22) , we getting

$$-1 \leq 1 - \frac{(\Delta t)^2}{2} - 2r^2 \, Sin^2\left(\frac{b\Delta x}{2}\right) \leq 1$$

And by taking the side right Inequalities (22) , we getting

$$1 - \frac{(\Delta t)^2}{2} - 2r^2 \, Sin^2\left(\frac{b\Delta x}{2}\right) \leq 1 \qquad (23)$$

And from Inequalities (23) , we getting

$$r^2 \geq \frac{-(\Delta t)^2}{4\, Sin^2\left(\frac{b\,\Delta x}{2}\right)}$$

Since $r^2 = \frac{(Dt)^2}{(Dx)^2}$, the value r^2 *is positve* , Inequalities (23) way to $r^2 > 0$ this true early , for to suicess Inequalities (22) , we need to :

$$-1 \le 1 - \frac{(\Delta t)^2}{2} - 2r^2\, Sin^2\left(\frac{b\Delta x}{2}\right)$$

$$2 \ge \frac{(\Delta t)^2}{2} + 2r^2\, Sin^2\left(\frac{b\Delta x}{2}\right)$$

$$1 - \frac{(\Delta t)^2}{2} \ge r^2\, Sin^2\left(\frac{b\Delta x}{2}\right)$$

And since $Sin^2\left(\frac{b\Delta x}{2}\right)$ $equal\ 1\ for\ value\ b$:

$$r^2 \le \frac{4-(\Delta t)^2}{4} \qquad (24)$$

And since $r^2 = \frac{(\Delta t)^2}{(\Delta x)^2}$ And from Inequalities (23) , we getting

$$(\Delta t)^2 \le \frac{4\ (\Delta x)^2}{4+(\Delta x)^2} \qquad (25)$$

And represent Inequalities$(24\ ,25)$ on Explicit Method , must the Stability no operation by equation $Sine - Gordon$.

5- Drived The General formula of $[Crank - Nicholson]$

In $[Crank - Nicholson]$ method we replace the 2nd partial derivative u_{xx} by the average of central difference at time t and points $(j-1\ , j+1)$ as shown in the figure (2) bellow [13] :

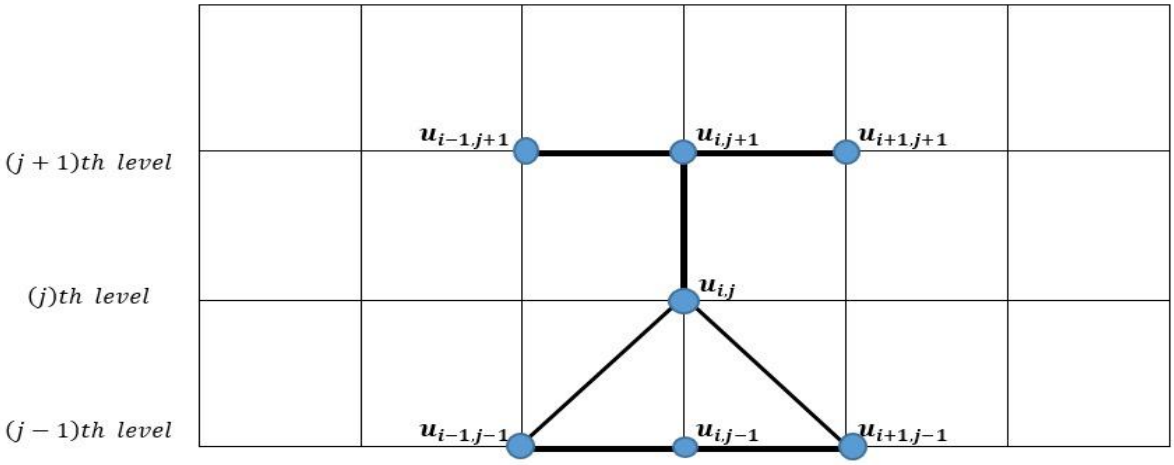

The form (2) show that solution by using $Crank - Nicholson$

$$\frac{\partial^2 u}{\partial x^2} = \frac{1}{2}\left(\frac{u_{i+1,j+1}-2u_{i,j+1}+u_{i-1,j+1}}{h^2} + \frac{u_{i+1,j-1}-2u_{i,j-1}+u_{i-1,j-1}}{h^2}\right) \qquad (26)$$

$$\frac{\partial^2 u}{\partial x^2} = \frac{u_{i,j+1}-2u_{i,j}+u_{i,j-1}}{k^2} \qquad (27)$$

And as substitute the equation $(26\ , 27)$ in equation (3) we get :

$$\frac{u_{i,j+1}-2u_{i,j}+u_{i,j-1}}{k^2} + \frac{u_{i+1,j+1}-2u_{i,j+1}+u_{i-1,j+1}}{2h^2} - \frac{u_{i+1,j-1}-2u_{i,j-1}+u_{i-1,j-1}}{2h^2} = \sin[u_{i,j}] \quad (28)$$

And from equation (28) we get :

$$-r^2\left[u_{i+1,j+1} + u_{i-1,j+1}\right] + \left[2+2r^2\right]u_{i,j+1}$$

$$= 4\,u_{i,j} - 2k^2 \sin[u_{i,j}] + r^2\,[u_{i+1,j-1} + u_{i-1,j-1}] - [2 + 2r^2]u_{i,j-1} \qquad (29)$$

Where the equation (29) is the approximate the finite difference of $[Crank - Nicholson]$ method for $[Sine - Gordon\,]\,method$, and hence we have : three variables $u_{i+1,j+1}$, $u_{i,j+1}$, $u_{i-1,j+1}$ and all terms in right hand side of equation (29) as know , so the equation (29) can be lead to the algebraic liner system with three daimeters

AX=B (30)

A : is a matrix have three diameters , X: Vertical vector , B: Vertical vector

Example \ Let we have rectangular plate (2m , 4m) and it is concid on x and y axis at original point

$\Delta t = 4\,sec,\quad \Delta x = 5cm\ ,\quad a = 1.25$

Initial condition $v(x\ ,t) = 0°\quad 0 < x < 10\quad t = 0$

Boundary condition $v(\,0\,,t) = 8°\ ,\ v(\,10\,,t\,) = \ 4°$

Solution \

1) Make the mesh and substitute the values on shaps

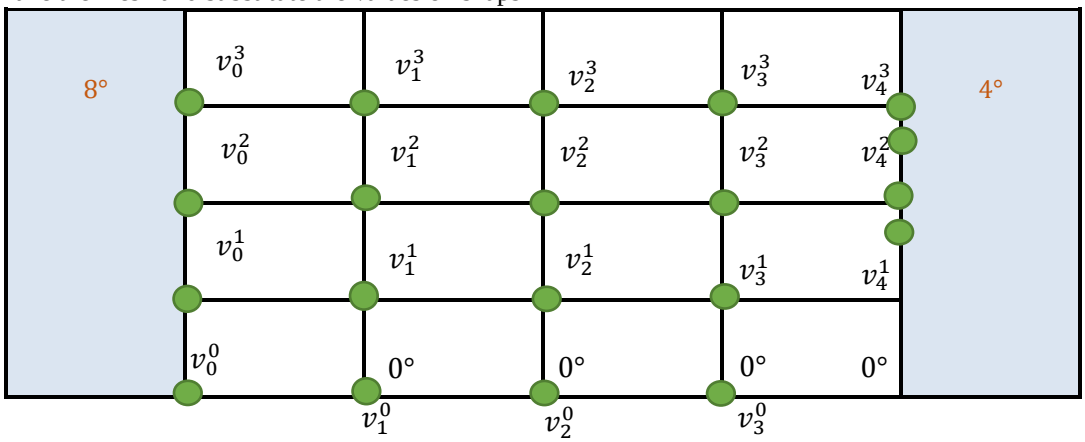

2) The crank – Nicolson general formula

$$-rv_{l-1}^{i+1} + 2(1+m)v_l^{i+1} - rv_{l+1}^{i+1} = rv_{l-1}^{i} + 2(1-m)v_l^{i} + rv_{l+1}^{i}$$

To find m

$$m = a\frac{\Delta t}{\Delta x^2} \rightarrow r = 1.25\,\frac{5}{5^2} = 0.2$$

Substitute from l = 123 , i= 0 , m= 0.2

$$-0.2v_0^1 + 2.4v_1^1 - 0.2v_2^1 = 0.2v_0^0 + 1.6v_1^0 + 0.2v_2^0$$

$$-0.2v_1^1 + 2.4v_2^1 - 0.2v_3^1 = 0.2v_1^0 + 1.6v_2^0 + 0.2v_3^0$$

$$-0.2v_2^1 + 2.4v_3^1 - 0.2v_4^1 = 0.2v_2^0 + 1.6v_3^0 + 0.2v_4^0$$

Substitute initial and boundary condition , we get

$$-0.2(8) + 2.4v_1^1 - 0.2v_2^1 = 0.2(0) + 1.6(0) + 0.2(0)$$

$$-0.2v_1^1 + 2.4v_2^1 - 0.2v_3^1 = 0.2(0) + 1.6(0) + 0.2(0)$$

$-0.2v_2^1 + 2.4v_3^1 - 0.2(4) = 0.2(0) + 1.6(0) + 0.2(0)$

Hence , we have

$2.4v_1^1 - 0.2v_2^1 = 1.6$ ... ... (1)

$-0.2v_1^1 + 2.4v_2^1 - 0.2v_3^1 = 0$ ... ... (2)

$-0.2v_2^1 + 2.4v_3^1 = 0.8$ ... ... (3)

Multiply equation (2) by 12 and solve it with equation (1) we have

$-2.4v_1^1 + 28.8v_2^1 - 2.4v_3^1 = 0$

$2.4v_1^1 - 0.2v_2^1 = 1.6$

$28.6v_2^1 - 2.4v_3^1 = 1.6$ ... ... (4)

Solve equation (4) and adding to equation (3)

$28.6v_2^1 - 2.4v_3^1 = 1.6$

$-0.2v_2^1 + 2.4v_3^1 = 0.8$

$28.4v_2^1 = 2.4$

$v_2^1 = 0.0845070423$

Substitute v_2^1 value in equation (1) we obtain v_1^1

$2.4v_1^1 - 0.2(0.0845070423) = 1.6$

$2.4v_1^1 = 1.6169014085$

$v_1^1 = 0.6737089202$

Substitute v_1^1 value in equation (3) we obtain v_3^1

$-0.2(0.0845070423) + 2.4v_3^1 = 0.8$

$2.4v_3^1 = 0.8169014085$

$v_3^1 = 0.3403755869$

Continue to Substitute from l = 123 , i= 0 , m= 0.2 in general formula

$-0.2v_0^2 + 2.4v_1^2 - 0.2v_2^2 = 0.2v_0^1 + 1.6v_1^1 + 0.2v_2^1$

$-0.2v_1^2 + 2.4v_2^2 - 0.2v_3^2 = 0.2v_1^1 + 1.6v_2^1 + 0.2v_3^1$

$-0.2v_2^2 + 2.4v_3^2 - 0.2v_4^2 = 0.2v_2^1 + 1.6v_3^1 + 0.2v_4^1$

Substitute initial and boundary condition , v_1^1 , v_2^1 , v_3^1

$-0.2(8) + 2.4v_1^2 - 0.2v_2^2 = 0.2(8) + 1.6(0.6737089202) + 0.2(0.0845070423)$

$-0.2v_1^2 + 2.4v_2^2 - 0.2v_3^2 = 0.2(0.6737089202) + 1.6(0.0845070423)$

$+0.2(0.3403755869)$

$-0.2v_2^2 + 2.4v_3^2 - 0.2(4) = 0.2(0.0845070423) + 1.6(0.3403755869) + 0.2(4)$

Hence , we have

$2.4v_1^2 - 0.2v_2^2 = 4.294835681$ ... ... (1)

$-0.2v_1^2 + 2.4v_2^2 - 0.2v_3^2 = 0.338028169.$ ... ... (2)

$-0.2v_2^2 + 2.4v_3^2 = 2.161502347$ ... ... (3)

Multiply equation (2) by 12 and solve it with equation (1) we have

$-2.4v_1^2 + 28.8v_2^2 - 2.4v_3^2 = 4.056338028$

$2.4v_1^2 - 0.2v_2^2 = 4.294835681$

$28.6v_2^2 - 2.4v_3^2 = 8.351173709$ ... ... (4)

Solve equation (4) and adding to equation (3)

$28.6v_2^2 - 2.4v_3^2 = 8.351173709$

$-0.2v_2^2 + 2.4v_3^2 = 2.161502347$

$28.4v_2^2 = 10.51267606$

$v_2^2 = 0.37016465$

Substitute v_2^2 value in equation (1) we obtain v_1^2

$2.4v_1^2 - 0.2(0.37016465) = 4.294835681$

$2.4v_1^2 = 4.368868611$

$v_1^2 = 1.820361921$

Substitute v_2^2 value in equation (3) we obtain v_3^2

$-0.2(0.1850823249) + 2.4v_3^2 = 2.161502347$

$2.4v_3^2 = 2.235535277$

$v_3^2 = 0.931473032$

Continue to Substitute from l = 123 , i= 2 , m= 0.2 in general formula

$-0.2v_0^3 + 2.4v_1^3 - 0.2v_2^3 = 0.2v_0^2 + 1.6v_1^2 + 0.2v_2^2$

$-0.2v_1^3 + 2.4v_2^3 - 0.2v_3^3 = 0.2v_1^2 + 1.6v_2^2 + 0.2v_3^2$

$-0.2v_2^3 + 2.4v_3^3 - 0.2v_4^3 = 0.2v_2^2 + 1.6v_3^2 + 0.2v_4^2$

Substitute initial and boundary condition , v_1^1 , v_2^1 , v_3^1

$-0.2(8) + 2.4v_1^3 - 0.2v_2^3 = 0.2(8) + 1.6(1.820361921) + 0.2(0.37016465)$

$-0.2v_1^3 + 2.4v_2^3 - 0.2v_3^3 = 0.2(1.820361921) + 1.6(0.37016465)$

$+0.2(0.931473032)$

$-0.2v_2^3 + 2.4v_3^3 - 0.2(4) = 0.2(0.37016465) + 1.6(0.931473032) + 0.2(4)$

Hence , we have

$2.4v_1^3 - 0.2v_2^3 = 6.186612004$ ... ... (1)

$-0.2v_1^3 + 2.4v_2^3 - 0.2v_3^3 = 1.14263043$ ... ... (2)

$-0.2v_2^3 + 2.4v_3^3 = 3.164389781$ ... ... (3)

Multiply equation (2) by 12 and solve it with equation (1) we have

$-2.4v_1^3 + 28.8v_2^3 - 2.4v_3^3 = 13.71156516$

$2.4v_1^3 - 0.2v_2^3 = 6.186612004$

$28.6v_2^3 - 2.4v_3^3 = 19.89817717$ ... ... (4)

Solve equation (4) and adding to equation (3)

$28.6v_2^3 - 2.4v_3^3 = 19.89817717$

$-0.2v_2^3 + 2.4v_3^3 = 3.164389781$

$28.4v_2^3 = 23.06256695$

$v_2^3 = 0.812062217$

Substitute v_2^3 value in equation (1) we obtain v_1^3

$2.4v_1^3 - 0.2(0.812062217) = 6.186612004$

$2.4v_1^3 = 6.349024447$

$v_1^3 = 2.645426853$

Substitute v_2^3 value in equation (3) we obtain v_3^3

$-0.2(0.812062217) + 2.4v_3^3 = 3.164389781$

$2.4v_3^3 = 3.326802225$

$v_3^3 = 1.386167594$

Crank-Nicolson	***Exact solution***
0.67370892	0.98
0.084507042	0.24
0.340375587	0.398
1.820361921	1.98
0.37016465	0.55
0.931473032	0.6
2.645426853	2.398

0.812062217	1.06
1.386167594	1.4

Table (1)

Stability of Crank-Nicolson

7- Conclusion

1.the Stability of Crank – Nicholson is un condition $\forall r^2$.
2.the Stability of Explicit Methods is stable if $r^2 \leq \frac{4-(Dt)^2}{4}$.
3.The Explicit Method is faster than Crank – Nicholson method to get the result (50%).
4.The Crank – Nicholson is more accuracy the Explicit Method .

المصادر

[1] الدلفي , حسن مجيد حسون , محمود عطا الله مشكور (1999) , التحليل الهندسي والعددي التطبيقي , الجامعة التكنلوجية , بغداد

[2] العاني , عطا الله ثامر العاني , (1982) المعادلات التفاضلية الجزئية للكليات العلمية والهندسية , جامعة بغداد .

[3]Ablowitz ,M.J .;B .M.Herbest and C .Schober (1996) On The Numerical SolutionThe Sine-Gordon Equation:I .Integrable Discretizations and HomocliniManifolds,J.Comput.Phys .126,PP.299-314

[4]Ares ,S .;J.A.Cuesta ,;A .Sanchez ,and R.Total(2003) ,Apparent Phase Transitions in Finite One-Dimensional Sine-Gordon Lattices,Phys .Rev.E67,046108.

[5] Ercolani,N.;M.G.Forest,andD.W.Mclaughlin(1990) ,GeometryOf The Modulation OF InStability III ,Homoclinic Oribit for thePeriodic Sine-Gordon Equation ,Physica D 43 ,PP .349-384.

[6]Garbey,M.;H.G .Kaper,and N .Romanyukha (2001) ,A Fast Solverfor System of Reaction-Diffusion Equation ,Thirteenth InternationalConference on Domain Decomposition Methods ,Editors:Debit ,N .;M Garbey ,;R Hoppe .j .periaus ,and Y.Knznetsov,PP .385-392.

[7]Khomeriki ,R .and J.Leon (2005) ,BiStability in Sine-Gordon:TheIdeal Switch ,Phys .Rev .E 71 ,056620.

[8]Landa ,P .S .(1996) Nonlinear Oscillations and Waves in DynamicalSystems ,Kluwer Academic Publisher.

[9]Mathews,J .H and K.D.Fink(2004) Numerical Methods Using Matlab, Prentice-Hall ,Inc.

[10]Quintero ,N .R.;A.Sanchez ,and F .G .Mentens (2000) ,Existence of Internal Modes of Sine-Gordon Kinds,Phys .Rev .E ,Vol.62, No .1 ,PP .60-63.

[11]Scott ,A .C .(2003) Nonlinear Science:Emergence and Dynamicsof Coherent Structures ,Second Edition ,Oxford and New York:Oxford University Press.

[12]Shanthakumar ,M .(1989) Computer Based Numerical Analysis, Khanna publishers.