

Study the structure and morphology of the compound
(ZnO)_{0.8}(CuO)_{0.2} by using nano materials.
Zena Mohammed Ali Abbas

Study the structure and morphology of the compound (ZnO)_{0.8}(CuO)_{0.2} by using nano materials.

Zena Mohammed Ali Abbas

University of Diyala, College of Science, Department of physics

Email: zenaalbana@yahoo.com

Received 5 September 2013 ; Accepted 4 December 2013

Abstract

Recent nanotechnological advances suggest that metal oxide nanoparticles (NPs) have been expected to be used in various fields. ZnO, CuO nano powders have been characterized by X-Ray Diffraction. Was used this nanomaterial to Prepare compacted-materials of (ZnO)_x(CuO)_{1-x}, by using powder metallurgy with weight ratio (x=0.8). The particle size calculations were done using XRD Scherer's formula (46.218 nm). The structure and surface morphology of the compound were examined by means of X-Ray Diffraction and scanning electron microscopic (SEM). XRD is an easy tool to determine the size and the shape of the unit cell for any compound. Composite nanostructures of these two oxides (CuO/ZnO) may pave the way for various new applications.

Keywords: powder metallurgy, (ZnO)_x(CuO)_{1-x}, nano powders.

دراسة التركيب والتشكيل الداخلي للمركب (ZnO)_{0.8}(CuO)_{0.2} باستخدام مواد نانوية

م.م زينة محمد علي عباس
جامعة ديالى / كلية العلوم / قسم الفيزياء

المخلص

تشير التطورات الأخيرة إن تقنيات النانو واكاسيد المعادن النانوية من المتوقع إن تستخدم بمجالات عديدة. مساحيق النانو لاوكسيد (ZnO)_x(CuO)_{1-x} الزنك وأوكسيد النحاس ميزت بواسطة حيود الأشعة السينية. تم استخدام مواد نانو لتحضير المركب. وقد تم حساب حجم الجسيمة باستخدام معادلة شيرر (46,218 نانومتر). (x=0.8) بواسطة تقنية تعدين المساحيق بنسب تم فحص التركيب والتشكيل الخارجي للمركب بواسطة جهاز حيود الأشعة السينية والمجهر الإلكتروني الماسح. مركبات النانو لهذه الاكاسيد (أوكسيد الزنك وأوكسيد النحاس) قد تمهد الطريق لمختلف التطبيقات الجديدة.

الكلمات الدالة: المساحيق النانوية، (ZnO)_x(CuO)_{1-x} تعدين المساحيق

**Study the structure and morphology of the compound
(ZnO)_{0.8}(CuO)_{0.2} by using nano materials.**

Zena Mohammed Ali Abbas

Introduction

Metal oxides are of interest to many scientific and technological disciplines. In particular, nanostructures of these materials have attracted considerable interest as they exhibit materials properties that differ strongly from those of the bulk phases. These particle size effects enable tailoring the materials to a wide range of applications including magnetic ferrofluids, electronics and catalysis [1]. Cupric oxide (CuO) is an important transition metal oxide with a narrow bandgap ($E_g=1.2$ eV) and forms the basis of several high temperature superconductors and giant magnetoresistance materials [2]. This material has a great potential for different technological applications such as gas sensors, magnetic phase transitions, catalysts, and superconductors [3]. The oxides of transition metals are an important class of semiconductors, which have applications in magnetic storage media, solar energy transformation, electronics and catalysis. Among the oxides of transition metals, CuO has attracted much attention because it is the basis of several high- T_c superconductors [4]. Zinc oxide is an important basic material due to its low cost, large band gap (3.37 eV), large exciton binding energy (60 MeV), and luminescent properties [5]. It is widely used in many applications, such as catalyst, gas sensor, filtering materials for ultraviolet light, microbe resistant defence clothing [6]. And also as antimicrobial and retanning agent [7]. XRD study is most important tool used in nano materials science. A discussion about simple and low cost preparation of nano powder and its X-ray diffractational (XRD) studies are presented in this study. XRD is an easy tool to determine the size and the shape of the unit cell for any compound [8].

Experimental:

Nano ZnO and nano CuO powders were prepared by precipitation method. The powders used to prepare (ZnO)_x(CuO)_{1-x} compact, by using powder metallurgy with weight ratio ($x=0.8$), are mixed to obtain a uniform distribution of the components. These are mixed using a variable speed electric mixer for (2 hours) for the purpose of obtaining a homogeneous mixture and the non-agglomerated mixtures are then dried in an oven at (80 °C) for (2 hours). A mold is designed for the manufacture of samples in the form of pellet in diameter (9mm) and thickness (5mm) and the weight of the sample is (1.3 g). It uses hydraulic press with a pressure of (500-700) psi, and the diameter of the mold used (1cm) with a high of (3cm). The specimens were sintered at (1000°C) for (4 h), and then cooled in the furnace to room temperature. The morphology, crystal structure and crystallinity of the nanostructures were monitored by using scanning electron microscope (SEM), and x-ray diffraction.

The X-ray diffraction pattern were recorded using XRD-6000 with $\text{CuK}\alpha$ ($\lambda=1.5406\text{\AA}$) that have an accelerating voltage of (220/50)HZ which is produced by SHIMADZU company, and the scanning electron microscope used in imaging the nanoparticles was a VEGA/EasyProbe which is a favorable combination of a scanning electron microscope and a fully integrated energy dispersive X- ray microanalyser produced by TESCAN, s.r.o., Libušina trída 21.

**Study the structure and morphology of the compound
(ZnO)_{0.8}(CuO)_{0.2} by using nano materials.**

Zena Mohammed Ali Abbas

Results and discussion

1- x-ray diffraction

X-Ray diffraction (XRD) has been performed for the identification of the crystal structure and growth orientation of the nanostructures. The crystal structure obtained was investigated by XRD. All diffraction data are in good agreement with JCPDS files No.39-0400, No.26-0571, No.05-0661, and No.0831. Figure (1) shows the XRD pattern of CuO/ZnO composite nanostructure. Both ZnO and CuO peaks appear in the pattern which confirms the presence of both materials. The peak at 2θ value of (39.3°) belongs to the monoclinic CuO while the peak at 2θ value of (34.8°) is related to the ZnO wurtzite structure. The XRD pattern of the synthesized is shown in Figure (1).

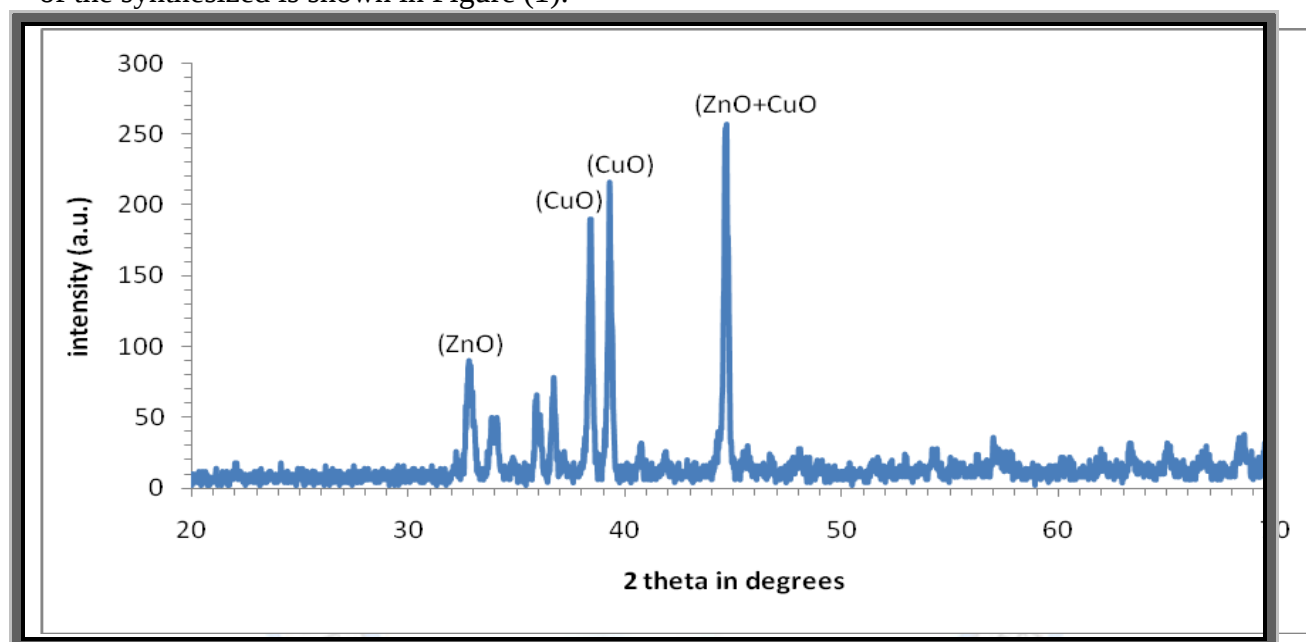


Figure 1. XRD pattern of (ZnO)_x(CuO)_{1-x} sample

The growth procedure of the ZnO and CuO nanostructures are described in this work. The high temperature sintering bath deposition method was chosen for the growth of ZnO, CuO and their composite nanostructures. After the growth, diverse characterization techniques were used to probe the morphology and structural aspects of the as grown nanomaterials. The detailed analysis of the XRD and the assignments of various reflections are given in Table (1).

Table 1: Strongest three peaks of fig.1

No.	Peak No.	2 Theta (deg)	d(A°)	FWHM (deg)
1	21	44.6726	2.02688	0.19010
2	15	39.3203	2.28956	0.17630
3	13	38.4252	2.34081	0.19300

**Study the structure and morphology of the compound
(ZnO)_{0.8}(CuO)_{0.2} by using nano materials.**

Zena Mohammed Ali Abbas

Particle Size Calculation from x-ray diffraction

From this study, considering the peak at degrees, average particle size has been estimated by using Debye-Scherrer formula [9, 10]

$$D = 0.9\lambda / \beta \cos \theta \dots\dots\dots (1)$$

Where λ is the wavelength of X-ray (0.15406 nm). β is FWHM (full width at half maximum). θ is the diffraction angle. For sample sintering at 1000°C:

$$D = 0.9\lambda / \beta \cos \theta \dots\dots\dots (1) \\ = 46.218 \text{ nm}$$

2- Scanning electron microscope

The morphology of the final products was determined by scanning electron microscopy (SEM). The particle morphology of the prepared ceramic materials were studied by using SEM images. Some particle agglomerates shows the SEM images of the as synthesized (ZnO)_x(CuO)_{1-x} sample at low and high magnification with less than (100 nm) diameter as was previously obtained. These micrographs shows clearly that the network formation and agglomeration of the (ZnO)_x(CuO)_{1-x} sample has taken place. We Show the irregular flower-like structures. Figure (2) shows SEM image of (ZnO)_x(CuO)_{1-x} with flower nanoparticle shape formation.

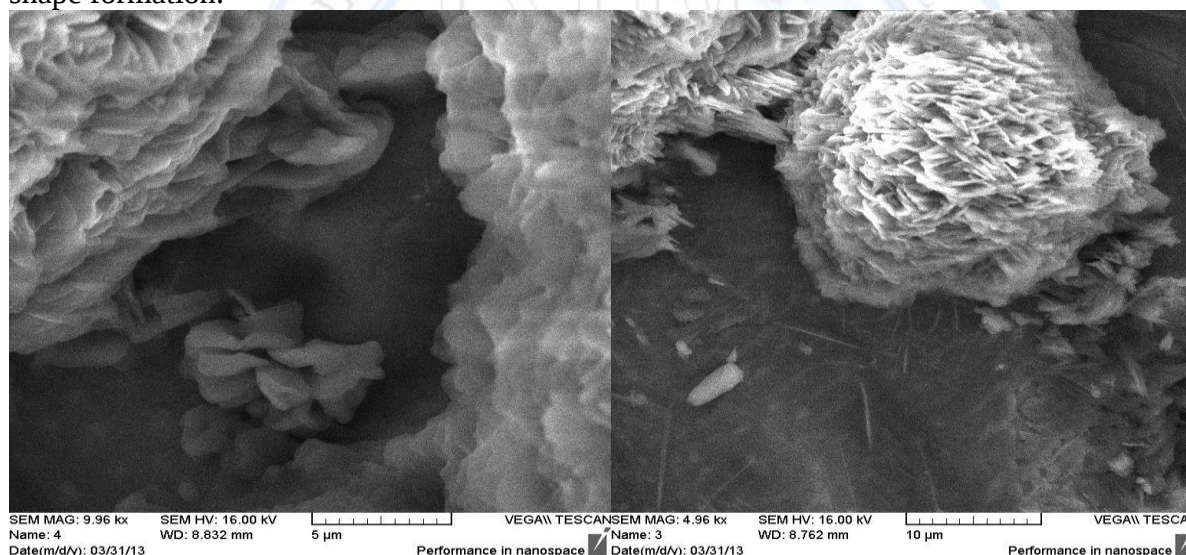


Figure 2. SEM images of (ZnO)_x(CuO)_{1-x} sample

References

- [1] A. Lagashettya, V. Havanoorb, S. Basavarajab, S.D. Balajib, A. Venkataraman, "Microwave-assisted route for synthesis of nanosized metal oxides" Science and Technology of Advanced Materials 8 P. 484–493. (2007).
- [2] A. GU, G. WANG, X. ZHANG and BIN FANG, " Synthesis of CuO nanoflower and its application as a H₂O₂ sensor" Indian Academy of Sciences (2010).

**Study the structure and morphology of the compound
(ZnO)_{0.8}(CuO)_{0.2} by using nano materials.**

Zena Mohammed Ali Abbas

- [3] D.M. Fernandes, R. Silvaa, A.A.Winkler Hechenleitner, E. Radovanovic a, M.A. CustodioMelob, E.A. Gomez Pinedaa," Synthesis and characterization of ZnO, CuO and a mixed Zn and Cu oxide" Materials Chemistry and Physics 115 , p.110–115, (2009).
- [4] H. Wang, J. Xu, J.Zhu, H.Yuan Chen," Preparation of CuO nanoparticles by microwave irradiation" Journal of Crystal Growth 244,p. 88–94 (2002).
- [5] J.Zhong, A.Kitai, P.Mascher and W. Puff, "The influence of processing conditions on point defects and luminescence centers in ZnO", J. Electrochem. Soc. 140,3644-3649 (1993).
- [6] V.Parthasarathi, G.Thilagavathi, International Journal of Pharmacy and Pharmaceutical Sciences, 3, 4 , 392-398 (2011).
- [7] H.R.Hawaz, B.A.Solangi, B.Zehra and U..Nadeem, Canadian Journal on scientific and industrial research, 2, 4, 164-170 (2011).
- [8] V. Petkov, T. Ohta, Y. Hou, and Y. Ren," Atomic-Scale Structure of nanocrystals by High-Energy X-ray Diffraction and Atomic Pair Distribution Function Analysis Nanoparticles", J. Phys. Chem. C, 111,p. 714-720,(2007).
- [9] S.Nath S., D.Chakdar, and G.Gope;" Synthesis of CdS and ZnS quantum dots and their applications in electronics, Nanotrends- A journal of nanotechnology and its application", 02(03), (2007).
- [10] B. D. Hall, D. Zanchet and D. Ugarte ; "Estimating nanoparticle size from diffraction measurements , Journal of Applied Crystallography", Volume 33, Part 6 (2000).
- [11] S. Zaman,"Synthesis of ZnO, CuO and their Composite Nanostructure for Optoelectronics,Sensing and Catalytic Applications, Linköping University Department of Science and Technology,2012